



your **RIGHT** choice

The **RIGHT** amount of **Floor Light** at the **RIGHT Price** backed by the **RIGHT Warranty**

**Dimmable LED Bulbs-6/10/15W - Wet Location and Non Dimmable LED Bulbs -6.5/9.5W**

**Product Features**

- Advance IC for smooth and flicker free dimming to 1/2 of 1%
- Wet location construction with UL listing
- Rugged lamp construction makes lamp suitable for harsh conditions
- Optimized Beam angle for complete usage of light on floor
- Advance LED Chip yielding upto 100 Lm/Watt on LED lamp
- Heat Sink without Fins – No Clogging/Ease of cleaning.
- Safety Silicon Gasket Included for keyless Socket

**6W A19 DIM - Wet Location**

545 lm/30K, 560 lm/50K

**10W A19 DIM - Wet Location**

950 lm/30K, 1050 lm/50K

**15W A21 DIM - Wet Location**

1450 lm/30K, 1600 lm/50K

**6.5W Non - Dim**

630 lm/27K, 630 lm/50K

**9.5W Non - Dim**

980 lm/27K, 980 lm/50K



120°

**6W A19 Overdrive**



230°

**9.8W Household OMNI**

Equal to =

6W	Lamp Wattage	9.5W
560	Lamp Rated Lumen	800
100%	%age Light on floor est.	65%
560	Effective Lumen on Floor	520
\$16	Energy Cost over 25,000 hr	\$26
\$10	Saving in Energy Cost over Life	-
<b>5 Year</b>	<b>Warranty</b>	<b>2 Year</b>

**Overdrive 'Dimmer + Controller'**

Overdrive Dimmer Controller with MOSFET control provides the finest dimming requirements for low light levels and strong lamp re-ignition. Dual Output channels can run independent lighting schedules which can illuminate or dim two lighting zones simultaneously. It's not only a dimmer but a controller also. For optimum performance and long life, use this dimmer controller with Overdrive dimmable Lamps.

Dimmer Model	Rating	6W/ LED/Dimmer	10W LED/Dimmer	15W LED/Dimmer
ODMR0210N	2 X 10 Amp	2 X 150 = 300	2 X 90 = 180	2 X 60 = 120

**Main Features of 'Dimmer + Controller' are as follows:**

- Dual Output zones can run independent lighting schedules.
- 3 Programs - Master, Manual, Slave mode for quick and easy programming
  - Master mode - easily set up your lighting programs thru the 24 hr clock within the dimmer. No controller needed.
  - Manual Mode with Keypad control
  - Slave mode with 0-10V DC analog voltage control
- Integrated 3" OLED Display
- Fully integrated digital control system for Precise and consistent dimming
- 4kV Surge Protection, Over Voltage Protection, Short Circuit Protection
- Replaceable output Fuses
- MOSFET Control reduces dimmer power loss and runs cooler



Call: 800-657-0509, Fax: 540-989-3057, [www.aglights.com](http://www.aglights.com)



## 20W H80 LED = 40W or 55W CFL

### Product Features

- Water Proof and Dust Proof
- Glass Free, Vibration resistant and impact resistant construction
- Advanced LED Chip yielding 135 Lumen per Watt (50K)
- Flicker-free and Instant Start
- Long life 50,000 hours
- 2500V Surge Protection
- No Fins- Easy to clean
- 120V / 277V Universal Operating Voltage
- Brightest LED Bulb saves upto 95% in energy cost

20W H80 LED LAMP • 135 lm / watt  
2300 lm/30K • 120-277V  
2700 lm/50K



## OMNI LED Bulbs




9.8W A19 OMNI DIM  
800 lm/27K/50K  
11W A19 OMNI DIM  
1100 lm/30K/50K  
15W A19 OMNI DIM  
1600 lm/27K/50K

6W A19 OMNI Non - Dim  
480 lm/27K

9.5W A19 OMNI Non - Dim  
800 lm/27K

Suitable for Damp Location Only

## Lighting Cord Sets... Offering the flexibility of relocating the lights to obtain better production numbers

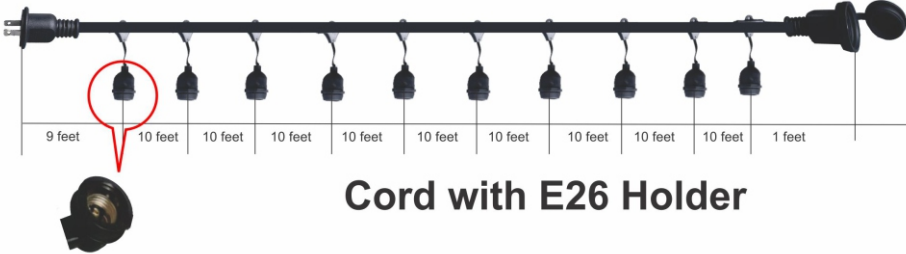

Cord with E26 Holder

- Nickel Plated Sockets provide resistance to corrosion
- 10 Feet Spacing between sockets for effective light distribution
- Water proof connector provided at both ends.
- Specially designed E26 Sockets to provide water resistance and additional safety
- Standard Lighting Cord of 100 feet with expandable water proof connector
- Heavy duty 14 AWG wire for minimum voltage drop over extended length usage
- 4 inch -Suspended E26 sockets to keep the lamp straight during usage

## MULTIPURPOSE IP66 (Jelly Jar) LED LUMINAIRES

### FEATURES :

- No Rewiring- E26 wired Base included for easy installation
- Adapts to most Jelly Jar fixtures
- Super Safe Heat Sink Construction-Unique Plastic + Aluminum
- Up to 2500V Surge Protection
- Suitable use in Wet location for cost effective lighting solution for harsh environments
- Glass Free, Vibration and impact resistant construction
- Less than 12 month ROI even for CFL replacement

### Mounting Options



Item No. - 703  
Surface Mount  
Junction Box



Item No. - 653  
Adapter For 4"  
Junction Box




Item No. - 702  
Wall Mount  
Junction Box



US Patent No.  
10 584 863 B1

Item No.	Wattage	Voltage	Dimmable	Beam Angle	Lumen	Lm/Watt	Color	ES
735*	10	120V	YES	145°	1100	110	3000K	YES
736*	10	120V	YES	145°	1200	120	5000K	YES
652	14	120-277V	No	160°	1440	103	5000K	YES
723	16	120V	YES	120°	1970	123	3000K	YES
724	16	120V	YES	120°	2160	135	5000K	YES
725	26	120-277V	No	120°	3170	122	5000K	YES
726	26	120-277V	No	120°	3050	117	3000K	YES
727	25	120V	YES	120°	3000	120	5000K	TBA

\* Available Jan 2021



Call: 800-657-0509, Fax: 540-989-3057, www.aglights.com